

FITTING INSTRUCTIONS: BIKE CARRIER

PRODUCT CODE NUMBER

BCF1

Fitting Instruction Sheet No.

85

ISSUE: L
23/04/08

Read these Fitting Instructions thoroughly before commencing installation.

1. INSTALLING THE BIKE CARRIER

- Place Fork Mounting Bracket onto Front Cross Bar. The Bike Carrier can be mounted with the leading edge towards the front or rear of the vehicle as desired (Fig.1). (Mounting with the leading edge facing rearward increases the distance between the fork skewer and the rear wheel bike track).
NOTE: The complete Bike Carrier assembly can be reversed if necessary. Therefore the Fork Mounting Bracket faces rearward on the Cross Bar.
- Using pressure, push down and back to clip the Fork Mounting Bracket onto the Cross Bar. Fit the Large Cap Screws and Flat Washers then tighten to secure to the Cross Bar (Fig. 1)
- Remove the lower section of the Half Clamp from the Bike Track. (Fig. 2)
- Place the Bike Track on the second Cross Bar and loosely secure the lower section of the Half Clamp (Fig.1).
- With the front wheel removed, position the bike onto the Bike Carrier. Slide the Bike Track and along the Half Clamp to position it centered beneath the rear wheel. Make sure that the Bike Track is centered over the Cross Bar. Remove bike from Bike Carrier.
- Check that Bike Track is aligned directly behind Fork Mounting Bracket. Then tighten all bolts.

2. FITTING BIKE TO BIKE CARRIER

- Remove the front wheel from bike.
- Position the bike with the rear wheel in the Bike Track and the front forks fitted in the Fork Mounting Bracket. While holding the bike upright tighten the Skewer Nut, (See Skewer Quick Release Instruction Sheet on separate page for full tightening procedures).
- The Bike Track is fitted with a Wheel Tie Down assembly. Slide the Wheel Tie Down assembly along the Bike Track (Fig.2) until it is centered below the rear wheel. Secure the Wheel Tie Down strap through the rear wheel of the bike shown in Fig 3.
- Secure the front wheel to the side of the Bike frame using the loose velcro straps supplied.

3. FINAL CHECK

Check that all bolts are tightened and Bike is secure to Bike Carrier before moving vehicle.

Fig. 1

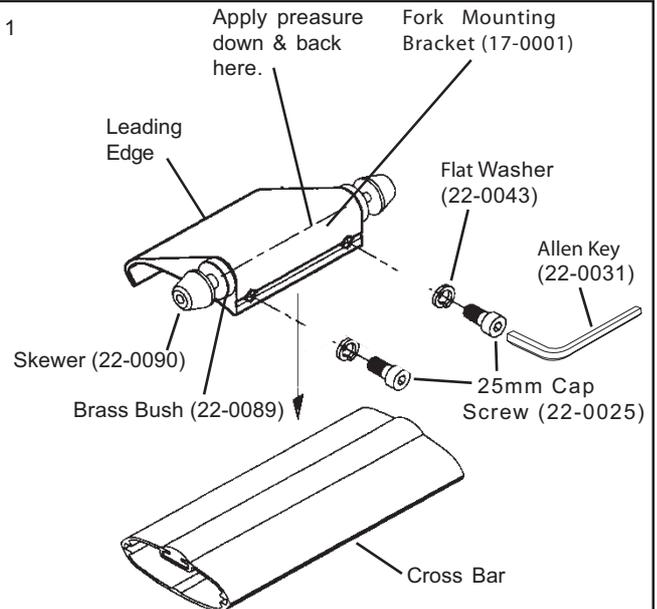


Fig 2


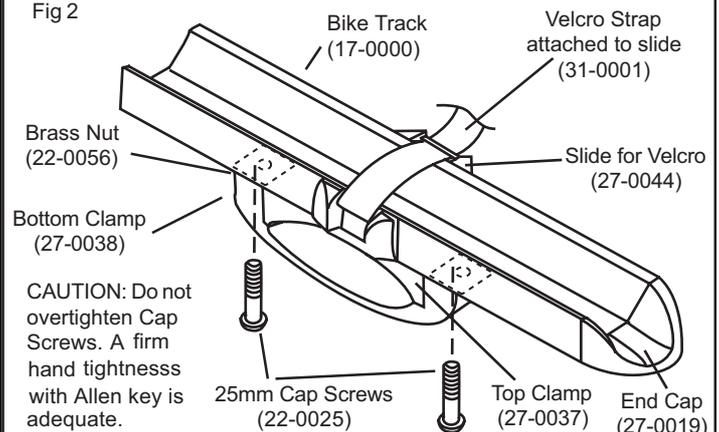


Fig 3

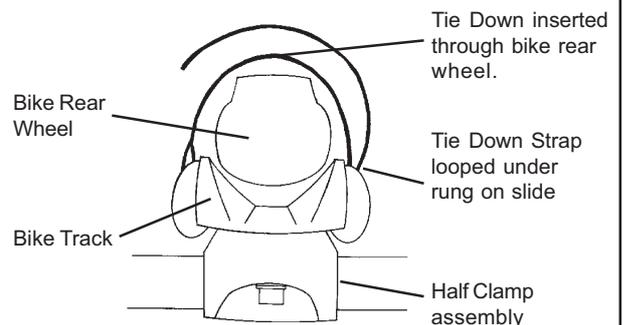

4. BIKE CARRIER CARE & MAINTENANCE

Your Bike Carrier is warranted against MATERIAL DEFECT only. The following steps will help ensure a trouble free life for your Bike Carrier.

- Ensure all attachment bolts are always tight.
- Bike Carrier SHOULD be removed from vehicle when not in use.
- The Skewer is made from non corrosion resistant materials, therefore leaving Bike Carrier mounted to vehicle may result in skewer damage.

CAUTION: Ensure you have sufficient clearance before entering undercover car parks or low garages with bike installed.

NOTE: Please refer to Skewer Quick Release Instruction Sheet (separate page) for full Skewer operation.



www.rola.com.au