

# FITTING INSTRUCTIONS: BIKE CARRIER

PRODUCT CODE NUMBER

RCBCF2

Fitting Instruction Sheet No.

163

ISSUE: G  
25/11/04

Read these Fitting Instructions thoroughly before commencing installation.

## 1. INSTALLING THE BIKE CARRIER




- Loosely fit the Track Bracket to the Fork Mounting Bracket using the Large Cap Screws and Spring Washers. (Note the orientation shown in Fig. 1).
- Place Fork Mounting Bracket onto Front Cross Bar. The Fork Mounting Bracket is mounted with the Leading edge towards the front of the vehicle (Fig. 1).  
NOTE: The complete Bike Carrier assembly can be reversed if necessary. Therefore the Fork Mounting Bracket faces rearward on the Cross Bar.
- Using pressure, push down and back to clip the Fork Mounting Bracket onto the Cross Bar. (Fig. 1) DO NOT TIGHTEN AT THIS STAGE.
- Slide the Retainer Clamps into the Bike Track to desired positions. (Fig. 2)
- Place the Bike Track into the Track Bracket and loosely secure using Short Cap Screw and Flat Washer (Fig.1).
- With Bike Track resting on the rear Cross Bar, position the Retainer Clamps on each side of the Cross Bar. Secure the Rear Clamp Bracket under the Cross Bar using short cap screws and spring washers supplied (Fig. 2). DO NOT TIGHTEN AT THIS STAGE.
- Check that Bike Track is aligned directly behind Fork Mounting Bracket. Then tighten all bolts.

## 2. FITTING BIKE TO BIKE CARRIER

- Remove the front wheel from bike.
- Position the bike with the rear wheel in the Bike Track and the front forks fitted in the Fork Mounting Bracket. While holding the bike upright tighten the Skewer Nut, (See Skewer Quick Release Instruction Sheet on separate page for full tightening procedures).
- The Bike Track is fitted with a Wheel Tie Down assembly. Slide the Wheel Tie Down assembly along the Bike Track (Fig.2) until it is centered below the rear wheel. Secure the Wheel Tie Down strap through the rear wheel of the bike shown in Fig 3.
- Secure the front wheel to the side of the Bike frame using the loose velcro straps supplied.

## 3. FINAL CHECK

Check that all bolts are tightened and Bike is secure to Bike Carrier before moving vehicle.

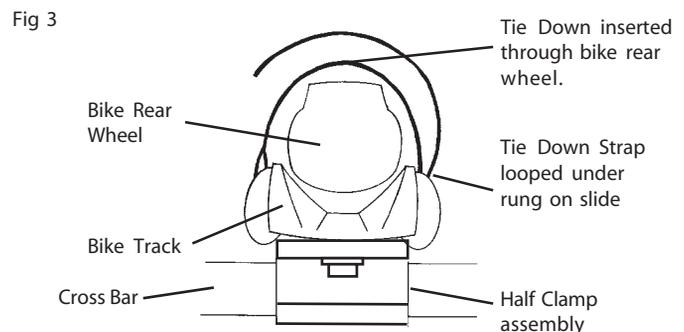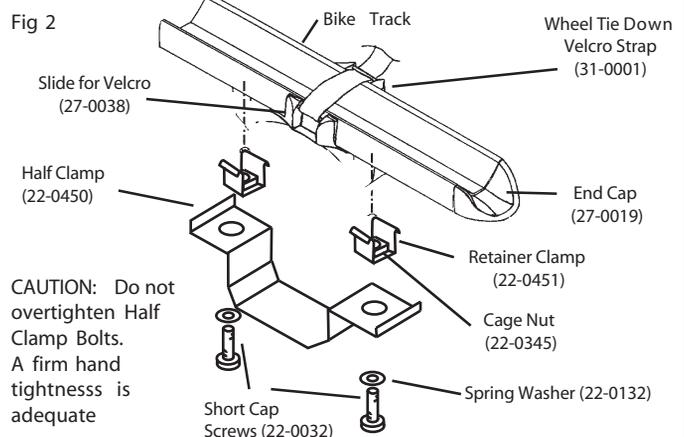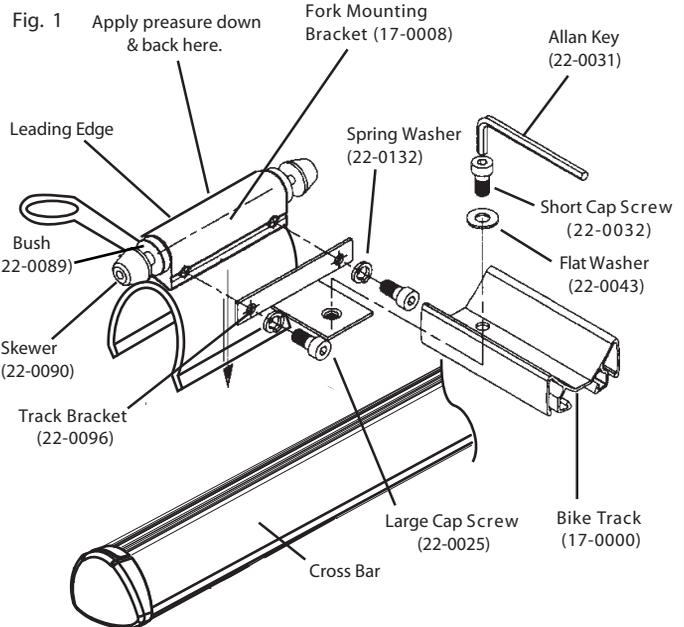

## 4. BIKE CARRIER CARE & MAINTENANCE

Your Bike Carrier is warranted against MATERIAL DEFECT only. The following steps will help ensure a trouble free life for your Bike Carrier.

- Ensure all attachment bolts are always tight.
- Bike Carrier SHOULD be removed from vehicle when not in use.
- The Skewer is made from non corrosion resistant materials, therefore leaving Bike Carrier mounted to vehicle may result in skewer damage.

CAUTION: Ensure you have sufficient clearance before entering undercover car parks or low garages with bike installed.

NOTE: Please refer to Skewer Quick Release Instruction Sheet (separate page) for full Skewer operation.



www.rola.com.au